



TECHNICAL DATA SHEET




Frequency response and range measured on-axis with passive crossover in an anechoic environment.  
Sensitivity measured in half-space boundary conditions with passive EQ, referenced to 1W/m.  
Maximum SPL calculated from sensitivity and power handling in half-space boundary conditions.

TECHNICAL DATA SHEET



***OS***



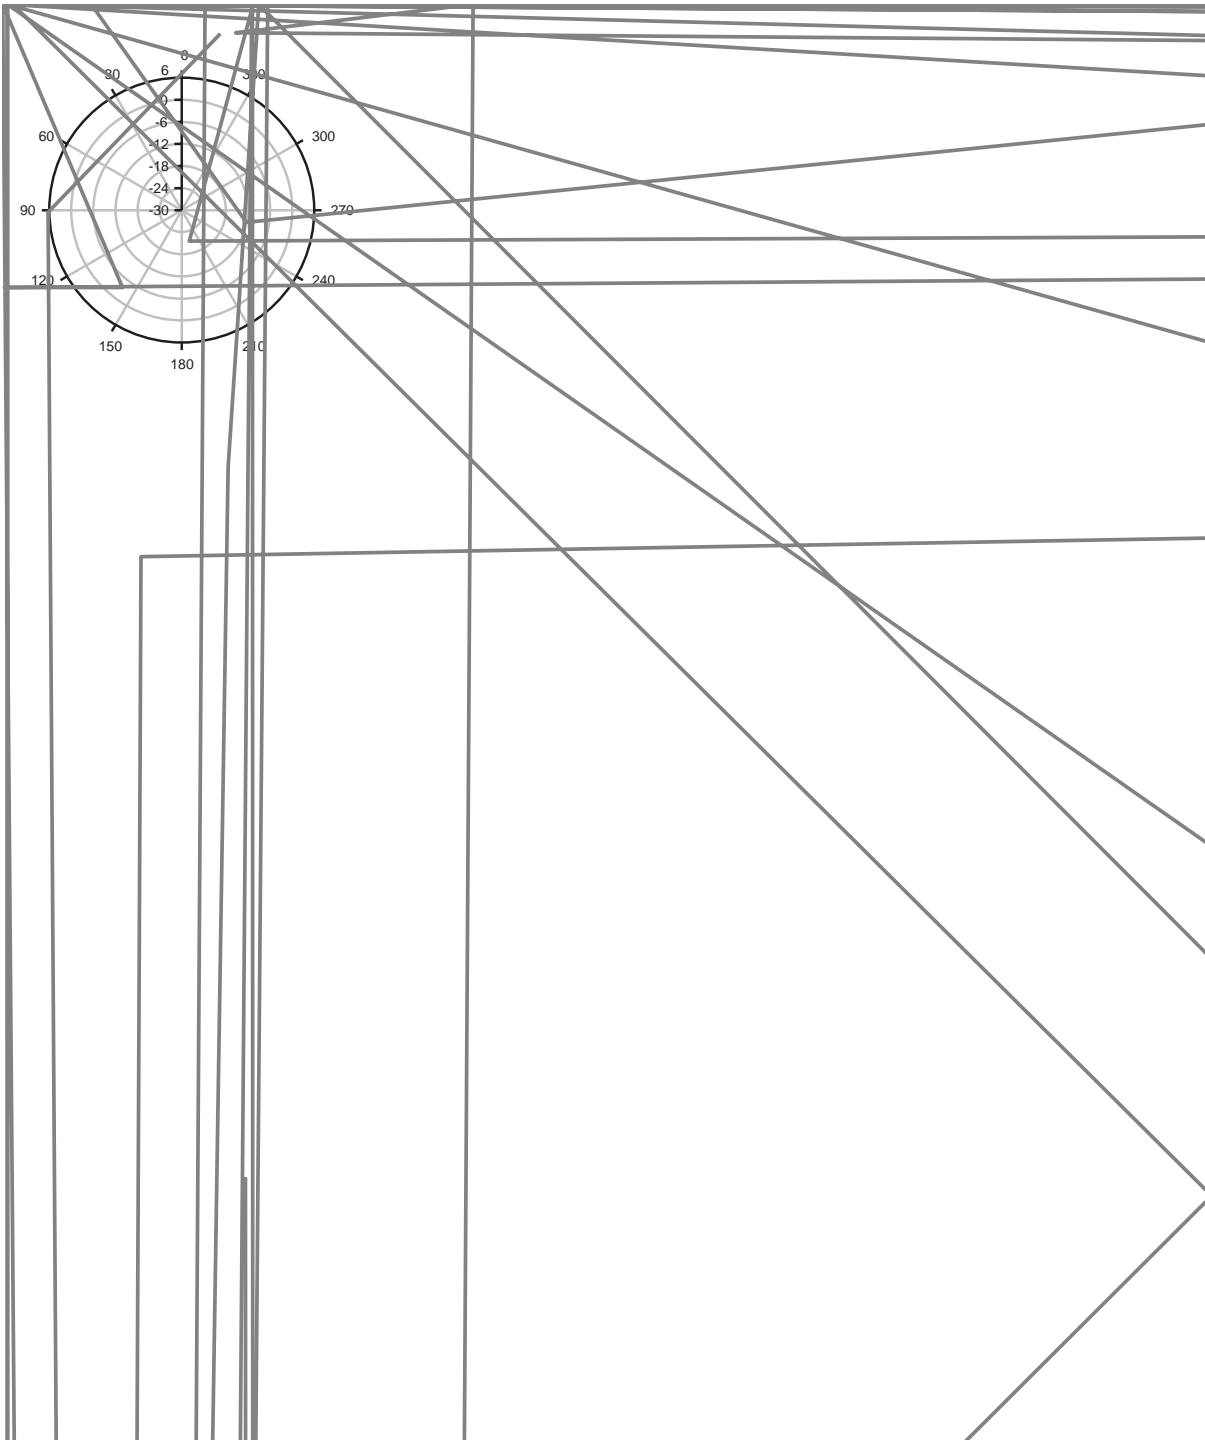



***BOSE***<sup>®</sup>

